



INSTALLATION INSTRUCTIONS

PART No.

FB22395
09-18 Dodge Ram
Rear Bumper



VIDEO AVAILABLE



REQUIRED TOOLS

4mm Hex Key
10mm Socket
7mm Socket
3mm Hex Key
18mm Socket
19mm Socket

KIT CONTAINS

Rear Bumper
M12 Hex Bolt
M12 Washer
M12 Nyloc Nut

QTY

1
4
4
4

Help of a friend

2137400

1) REMOVE EXISTING BUMPER

Begin removing your vehicle's existing bumper and grille. We show how to do this in another video over at www.fishboneoffroad.tv



Remove the sensors and sensor wiring harness. Remove the trailer plug. Remove the license plate lights.


2) SETUP

Install your trailer plug, sensors, license plate lights, and license plate into the bumper.



3) INSTALL THE BUMPER

With the help of a friend and the 4 of the included m12 nuts and washer, secure the bumper to the frame rails with an 19mm socket and 18mm wrench.

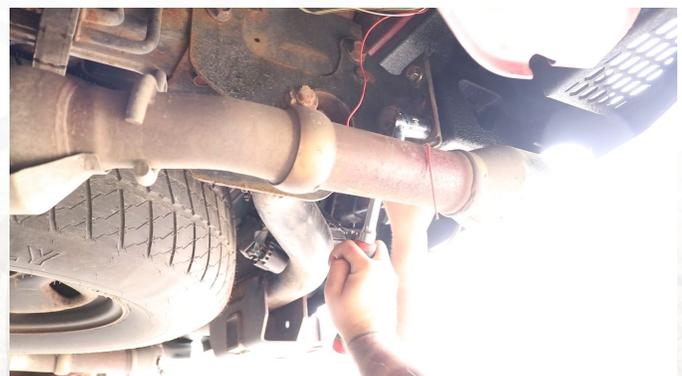

If your vehicle does not have dual exhausts, use the included covers to seal up the openings.